


# PUNTE PER FORI CIECHI GAMBO 8 mm.

## HW SPECIAL DOWELL DRILL BITS

Shank D.8 mm. with flat and adjusting screw. PTFE antiseizure coating. Special chip free negative spurs action. Black colour for right rotation -orange colour for left rotation.


### 305A

Codice HW - RH	Codice HW -LH	D. mm.	L. mm.	Lu mm.	S x A mm.
305.04AR	305.04AL	4	55.5	30	8X20
305.05AR	305.05AL	5	55.5	30	8X20
305.06AR	305.06AL	6	55.5	30	8X20
305.07AR	305.07AL	7	55.5	30	8X20
305.08AR	305.08AL	8	55.5	30	8X20
305.09AR	305.09AL	9	55.5	30	8X20
305.10AR	305.10AL	10	55.5	30	8X20
305.11AR	305.11AL	11	55.5	30	8X20
305.12AR	305.12AL	12	55.5	30	8X20

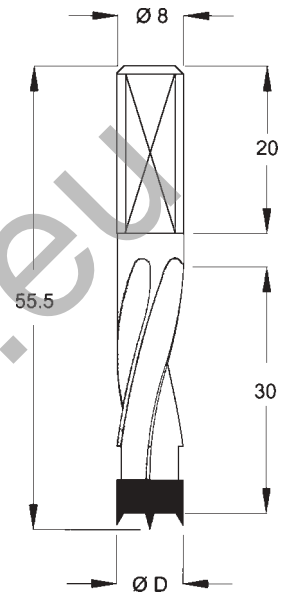

### 305B

Codice HW - RH	Codice HW -LH	D. mm.	L. mm.	Lu mm.	S x A mm.
305.04BR	305.04BL	4	67	40	8X20
305.05BR	305.05BL	5	67	40	8X20
305.06BR	305.06BL	6	67	40	8X20
305.07BR	305.07BL	7	67	40	8X20
305.08BR	305.08BL	8	67	40	8X20
305.09BR	305.09BL	9	67	40	8X20
305.10BR	305.10BL	10	67	40	8X20
305.11BR	305.11BL	11	67	40	8X20
305.12BR	305.12BL	12	67	40	8X20

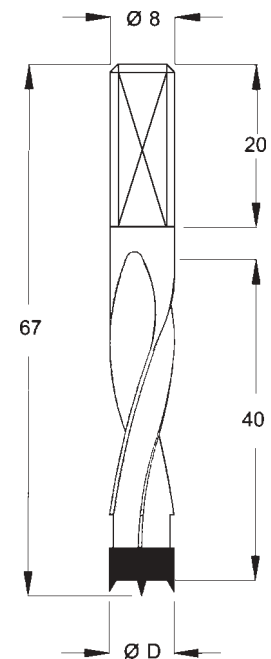

Gambo D.8 mm. con piano e vite di regolazione. Incisori ad affilatura negativa. Teflonatura di colore nero per rotazione destra e colore arancio per rotazione sinistra.