

# 252-253 LAME CIRCOLARI PER ALLUMINIO

LIGHT ALLOY SAW BLADES WITH NEGATIVE HOOK ANGLE

## 252S ANGOLO NEGATIVO NEGATIVE HOOK ANGLE

| Codice nr.<br>HW | D.<br>mm. | B/b<br>mm. | d.<br>mm. | Z   | FT      |
|------------------|-----------|------------|-----------|-----|---------|
| 252 25S          | 250       | 3.4/2.6    | 30-32     | 60  | 2/11/63 |
| 252 30S          | 300       | 3.4/2.6    | 30-32     | 72  | 2/11/63 |
| 252 35S          | 350       | 3.4/2.6    | 30-32     | 84  | 2/11/63 |
| 252 40S          | 400       | 4.0/3.2    | 30-32     | 96  | 2/11/63 |
| 252 45S          | 450       | 4.0/3.2    | 30-32     | 108 | 2/11/63 |
| 252 50S          | 500       | 4.6/3.6    | 30-32     | 120 | 2/11/63 |


AFFILATURA TRAPEZIO-PIANA PER ALLUMINIO.  
PER ALLUMINIO PROFILATO O PIENO.  
FORO STANDARD 32.

TRAPEZOIDAL-FLAT TOOTH FOR LIGHT ALLOY.NEGATIVE HOOK ANGLE.  
FOR SEPARATING AND MITRE CUTS.  
STANDARD BORE 32 mm.



● PRONTO A MAGAZZINO - IN STOCK

S =SILENZIATE - LOW NOISE  
DS=DOPPIA SILENZIATURA  
-ULTRA LOW NOISE

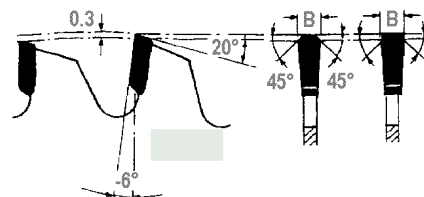

## 253S ANGOLO NEGATIVO NEGATIVE HOOK ANGLE

| Codice nr.<br>HW | D.<br>mm. | B/b<br>mm. | d.<br>mm. | Z   | FT      |
|------------------|-----------|------------|-----------|-----|---------|
| 253 20S          | 200       | 3.2/2.5    | 30-32     | 64  | 2/11/63 |
| 253 25S          | 250       | 3.4/2.6    | 30-32     | 80  | 2/11/63 |
| 253 30S          | 300       | 3.4/2.6    | 30-32     | 96  | 2/11/63 |
| 253 35S          | 350       | 3.4/2.6    | 30-32     | 108 | 2/11/63 |
| 253 40S          | 400       | 4.0/3.2    | 30-32     | 120 | 2/11/63 |
| 253 45S          | 450       | 4.0/3.2    | 30-32     | 128 | 2/11/63 |
| 253 50S          | 500       | 4.6/3.6    | 30-32     | 140 | 2/11/63 |

COME ART.252S MA CON MIGLIORE FINITURA  
AS CODE 252S BUT WITH BETTER CUTTING QUALITY